



Tablet-Like Touch

Flush Edge-to-Edge Design


InGlass™ supports simple and slim integration with a completely flush surface enabling true edge-to-edge industrial designs with no bezel.

Unmatched Optical Clarity

InGlass™ Touch enables a perfect viewing experience since it has no sensor grid obstructing the visual clarity, while also using highly transmissive anti-finger print treated glass.

Touch, Pen and Pressure Support

InGlass™ Touch offers industry-leading multi-touch performance, ensuring a perfect Windows or Android user interface experience. The technology also has the unique ability to sense more than 1,000 levels of pressure. This enables pressure sensitive drawing and writing as well as new application gestures for music, gaming and smart user interfaces.

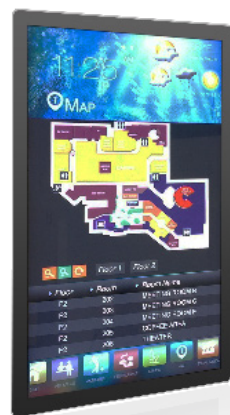

55" HD Multi-Touch Display

Features:

- HD 55" Display
- Unmatched optical clarity
- Thin, edge-to-edge design - no bezel
- Stylus / finger differentiation with pressure detection
- Up to 10 simultaneous touches and glove support
- Ultra fast response
- Windows 7/8/10, Linux, Android



Specification

| | |
|---------------------|----------------------------|
| Display Type: | 55" TFT, LED Backlit |
| Display Resolution: | 1920 x 1080 |
| Aspect Ratio: | 16:9 |
| Brightness: | 700 nit (cd/m2) |
| Contrast: | 1300:1 |
| Colors: | 1.06 Billion |
| Response Time: | 8ms typical |
| Orientation: | Landscape or Portrait |
| Viewing Angle: | 178° Horizontal & Vertical |
| Frame Rate: | 60Hz |
| Video Inputs: | |
| HDMI 2.0: | 1080p @60Hz |
| HDMI 1.4: | 1080p @60Hz |
| DisplayPort 1.2: | 1080p @60Hz |
| Communications: | Ethernet (option) RS232 |
| Mounting: | VESA 400mm x 400mm |

| | |
|----------------------|---|
| Touch Performance: | 10 Point, Min 4mm finger, glove, stylus |
| User Controls: | IR remote, OSD buttons, brightness, contrast, sharpness, color, temperature, backlight brightness |
| Features: | PIP, PBP Hot Keys: Programmable buttons |
| Temperature: | <0 to 50°C |
| Humidity: | 20-85% non-condensing |
| Certifications: | FCC Class A, TUV / CE, IEC60065 |
| Power Consumption: | 100 - 240VAC 50/60Hz / 125 Watts |
| Display Dimensions: | 51.39" W x 30.55" H x 3.67" D |
| Display Weight: | 72 lbs, 32.65 kg |
| Shipping Dimensions: | 57" W x 36" H x 10" D |
| Shipping Weight: | 85 lbs, 38.55 kg |

Specifications subject to change without notice